

## File ceiling

code F1200.8HCXD/01




### PRODUCT DESCRIPTION


Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 12.8 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali / Touch & Dimm. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

### PRODUCT SPECS

|                           |                              |
|---------------------------|------------------------------|
| Installation method       | Ceiling surface mounted      |
| Absorbed power            | 12,8 W                       |
| Color temperature         | Horticulture                 |
| Color rendering index CRI | >90                          |
| Optic                     | Microprismatic diffuser      |
| Finishing                 | White                        |
| MacAdam color tolerance   | 3                            |
| Life time estimate        | 50000h Ta 25° L80 B10        |
| Protocol                  | Dimmable Dali / Touch & Dimm |
| Energy efficiency class   | E                            |
| Weight                    | 2.34 Lbs                     |
| Dimension                 | L22.83"                      |
| IP Grade                  | IP40                         |
| Power supply              | 220-240V 50-60Hz             |

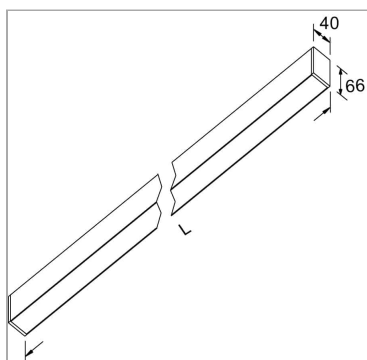

### FILE microprismatic LED

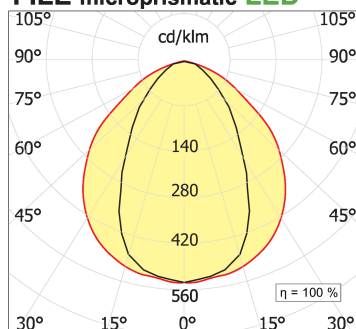

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

