
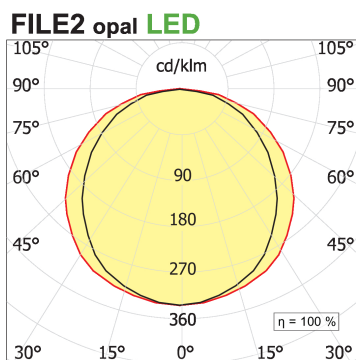


File 2 suspension 24W/m

code F2303.8HCP/01

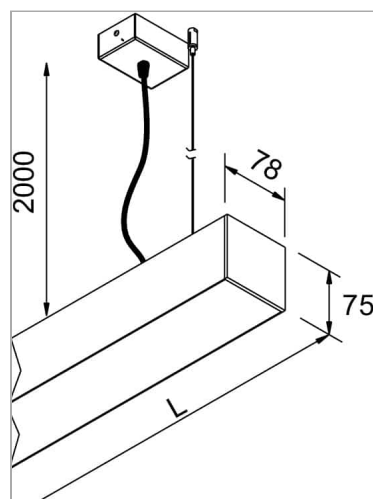

PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free, wiring through 5 cables with quick-release terminal blocks, protocol On/Off. Lamp with color finish white, Opal polycarbonate diffuser in polycarbonate with diffusing film. Degree of protection IP40/IP43.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	32 W
Color temperature	Horticulture
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
MacAdam color tolerance	3
Durata media stimata	50000h Ta 25° L70B10
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	E
Dimension	L55.91"
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43

WEB PAGE



ASSEMBLY INSTRUCTIONS

