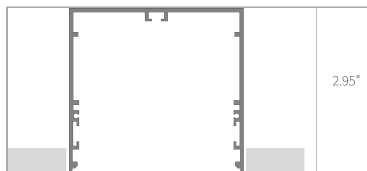


**File 2 System - Recessed empty
profile**

code LT2524.1000/01

**PRODUCT DESCRIPTION**

Extruded aluminium profile with a height of 75 mm and a width of 78mm, with a 4mm frame; for recessed installations; colour finish white;

PRODUCT SPECS

Installation method	system
Finishing	White
Dimension	L39.37xW3.07xH2.95"
Hole size	82 x L +2 mm


WEB PAGE**ASSEMBLY
INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

File 2 System – Recessed couple empotrable heads

code LT2525/01




Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 75x78 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide, and trimless, fully-retracting flush recessed. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps, recessed versions with built-in LED source or for QPAR16 halogen/LED lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20/IP40 protection rating.

Technical Sheet



Couple of closure heads 78 mm

code LT2890.1



Modular system designed to illuminate architecture. Exterior walls both vertical and horizontal, brick, concrete, coats, ceilings and false ceilings. The 78 mm profile can be integrated with different lighting elements: linear LED source, led rulers and Spot elements from the Focus line, antiglare lines from the LEVA collection offer the possibility of accent lighting. Degree of protection IP66.

Technical Sheet

