
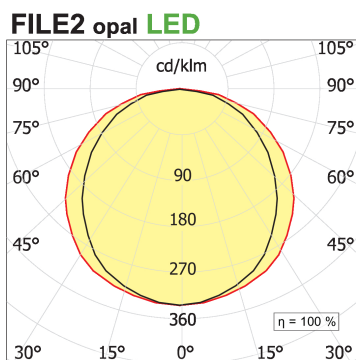
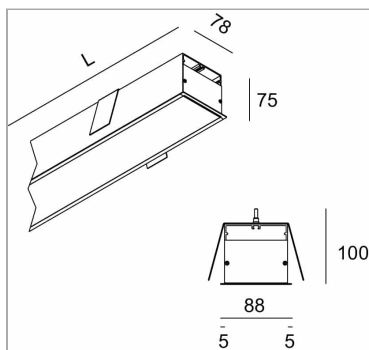


File 2 Outdoor recessed 32W/m

code F2052.930PD/01

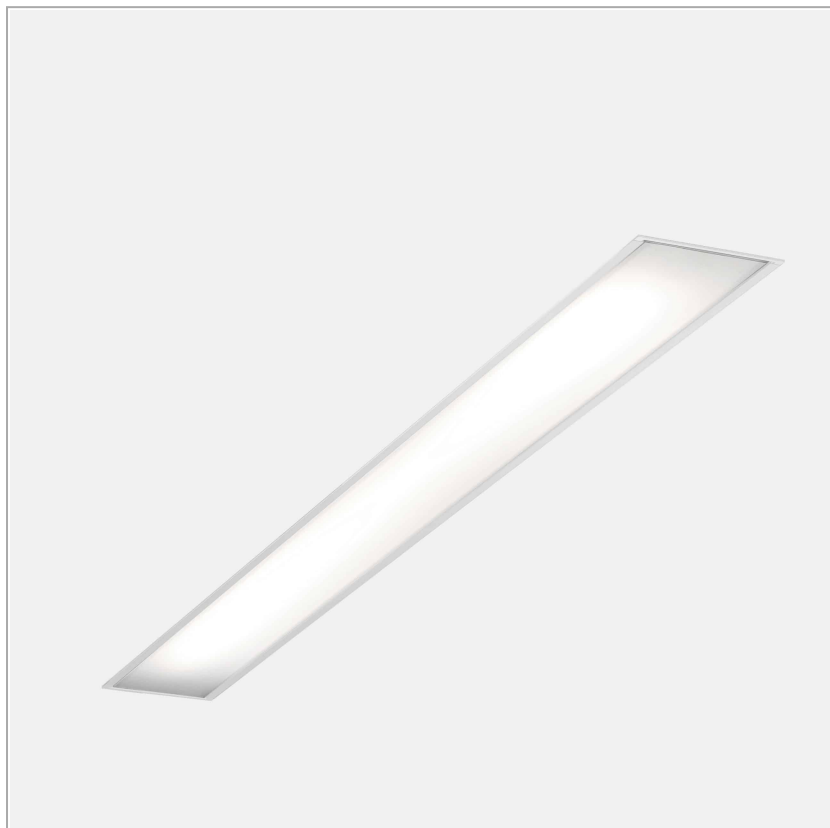

PRODUCT DESCRIPTION

Recessed direct light lamp; CRI >90 colour rendering. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali. Lamp with color finish white; Opal polycarbonate diffuser. Degree of protection IP54.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	linear LED 32W/mt CRI90
Absorbed power	36 W
Color temperature	3000K
Color rendering index CRI	90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	2573 lm
Luminous efficiency	71 lm/W
Power supply/transformer	Included
Protocol	Dimmable Dali
Energy efficiency class	D
Weight	7.28 Lbs
Dimension	L44.88"
Hole size	squared cut 80xL+2 mm
IP Grade	IP54
plasterboard thickness	min. 9 mm - max. 15 mm


WEB PAGE



OPTIONAL ACCESSORIES

Accessori Wallbox Couple of closure heads for wallbox FILE 2

code LT2890.1

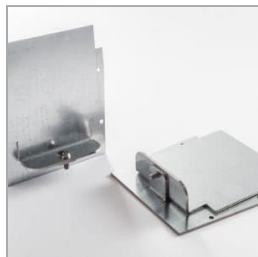

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 75x78 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide, and trimless, fully-retracting flush recessed. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps, recessed versions with built-in LED source or for QPAR16 halogen/LED lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20/IP40 protection rating.

Technical Sheet



File 2 System Single bracket to fix the lighting modules

code LT2891

order 2 Brackets For proFile



Technical Sheet

