


**File 2 track 24W/m**

code F2502.840X/01

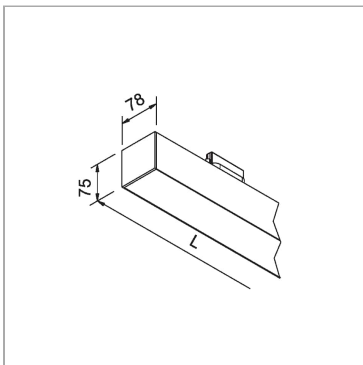

**PRODUCT DESCRIPTION**

Direct light indoor track lamp made of extruded aluminum 6060; complete with LED; color rendering index CRI>90. Protocol On/Off; lamp with colour finish white; in polycarbonate with diffusing film. Protection rating IP40/IP43. Can be installabile on most tracks 3 phases in trade the product in white and oxised silver mount a white track adapter. The product in black, oxised inox, moka mount a black track adapter. For connection to theOne Track (A.A.G. Stucchi ) or Global Track pulse (Nordic Aluminium).

**PRODUCT SPECS**

Installation method	Track
Absorbed power	25,6 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	4087 lm
Luminous efficiency	160 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	On/Off
Energy efficiency class	E
Dimension	L44.88"
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**

