

**File H ceiling. Direct and diffused light**

code F1H34.840XD/01




**PRODUCT DESCRIPTION**


Lampada a luce diretta da soffitto indoor realizzata in estruso di alluminio 6060, completo di led; indice di resa cromatica CRI >90. Moduli led professionali assemblati e cablati su dissipatore in estruso di alluminio con riflettore high performance, dotato di molle in acciaio armonico per installazione nel profilo Tools free; cablaggio passante 5 cavi con morsettiere ad innesto rapido; protocollo Dimmable Dali. Lampada con finitura di colore white; in policarbonato con pellicola diffondente. Grado di protezione IP40.

**PRODUCT SPECS**

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Ceiling surface mounted |
| Absorbed power               | 38,4 W                  |
| Color temperature            | 4000K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Microprismatic diffuser |
| Finishing                    | White                   |
| Luminous flux of the product | 6131 lm                 |
| Luminous efficiency          | 160 lm/W                |
| MacAdam color tolerance      | 3                       |
| Life time estimate           | 50000h Ta 25° L80B10    |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | D                       |
| Dimension                    | L66.93"                 |
| IP Grade                     | IP40                    |
| Power supply                 | 220-240V 50-60Hz        |

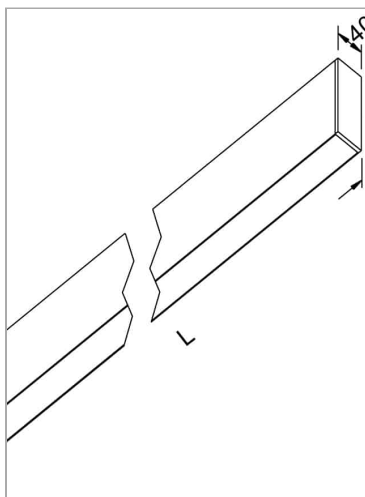

**FILE microprismatic LED**

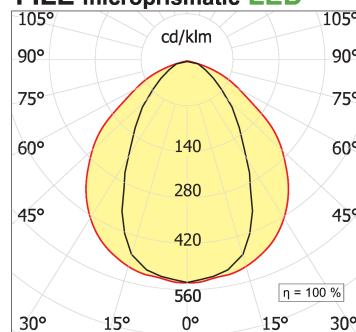

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**

