


## Minifile System Trimless recessed empty profile

code LTM00R.1000/01

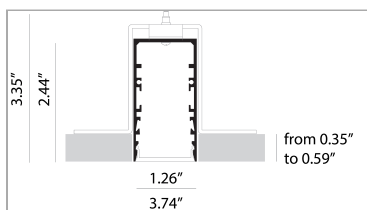

### PRODUCT DESCRIPTION

Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### PRODUCT SPECS

|                     |                     |
|---------------------|---------------------|
| Installation method | system              |
| Finishing           | White               |
| Dimension           | L39.37xW1.26xH2.44" |
| Hole size           | 34 x L +2 mm        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 4

## OPTIONAL ACCESSORIES

### Container Minifile Empty profile



code LTMF.1000/01

Recessed with frame / system indoor item. Bianco finishing item  
\*extruded aluminium to recess in Brick or reinforced concrete. Through this code it's possible to order the profile in a not-standard linear length. Replace the word "misura" with the desired length in mm. To order a profile with one or both ends 45° angle-cut add the letter "D" (right cut) or "S" (left cut) to the standard or custom length. for lengths over 3 mt. to max. 6 mt. transport conditions to negotiate.

Technical Sheet



code LTMF.2000/01

Recessed with frame / system indoor item. Bianco finishing item  
\*extruded aluminium to recess in Brick or reinforced concrete. Through this code it's possible to order the profile in a not-standard linear length. Replace the word "misura" with the desired length in mm. To order a profile with one or both ends 45° angle-cut add the letter "D" (right cut) or "S" (left cut) to the standard or custom length. for lengths over 3 mt. to max. 6 mt. transport conditions to negotiate.

Technical Sheet



code LTMF.3000/01

Recessed with frame / system indoor item. Bianco finishing item  
\*extruded aluminium to recess in Brick or reinforced concrete. Through this code it's possible to order the profile in a not-standard linear length. Replace the word "misura" with the desired length in mm. To order a profile with one or both ends 45° angle-cut add the letter "D" (right cut) or "S" (left cut) to the standard or custom length. for lengths over 3 mt. to max. 6 mt. transport conditions to negotiate.

Technical Sheet



code LTMF.misura/01

Recessed with frame / system indoor item. Bianco finishing item  
\*extruded aluminium to recess in Brick or reinforced concrete. Through this code it's possible to order the profile in a not-standard linear length. Replace the word "misura" with the desired length in mm. To order a profile with one or both ends 45° angle-cut add the letter "D" (right cut) or "S" (left cut) to the standard or custom length. for lengths over 3 mt. to max. 6 mt. transport conditions to negotiate.

Technical Sheet



### Minifile System Couple of closure

code LTM160/01



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

Technical Sheet



### Minifile System Minifile recessed single bracket

code LTM116

one every 1 meter



Technical Sheet



### Linear joint couple




### code LTM211

Modular system of 30X30 mm single and bi-emission extruded aluminium profiles, for recessed, ceiling and suspension installation, with LED linear sources and 230/240V electronic ballasts. Its dimensions make it suitable for installation on radiant ceilings by means of appropriate bracket. Painted finish. Diffuser screens in opal polycarbonate and side closing heads with Light Proof system. Degree of protection IP20/ IP40.

### Technical Sheet



## Angle connector couple



### code LTM211.90

Sistema modulare studiato per illuminare l'architettura. Pareti esterne sia verticali che orizzontali, a laterizio, calcestruzzo, cappotti, soffitti e controsoffitti. Il profilo da 78 mm può essere integrato con diversi elementi luminosi: sorgente lineare LED, reglette led ed elementi Spot della linea Focus, le linee antiglare della collezione LEVA offrono la possibilità di un'illuminazione d'accento. Grado di protezione IP66.

### Technical Sheet



## Minifile System Opal white polycarbonate diffuser

### code LTM044.1000



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### Technical Sheet



### code LTM044.2000



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### Technical Sheet



### code LTM044.3000



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### Technical Sheet



### code LTM044.misura



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### Technical Sheet



## Minifile System Extruded aluminium closing cover



#### code FM6.1000/01

\*Through this code you can order the profile in a non-standard linear length. Replace the word "measure" with the desired length in mm. To order a profile with one or both ends cut at a 45 ° angle, add to the measure the letter "D" (Right cut) or "S" (Left cut). Follow the instructions on p. 652. For profiles over 3 meters and maximum 6 meters the transport conditions are to be agreed.

#### Technical Sheet



#### code FM6.2000/01

\*Through this code you can order the profile in a non-standard linear length. Replace the word "measure" with the desired length in mm. To order a profile with one or both ends cut at a 45 ° angle, add to the measure the letter "D" (Right cut) or "S" (Left cut). Follow the instructions on p. 652. For profiles over 3 meters and maximum 6 meters the transport conditions are to be agreed.

#### Technical Sheet



#### code FM6.3000/01

\*Through this code you can order the profile in a non-standard linear length. Replace the word "measure" with the desired length in mm. To order a profile with one or both ends cut at a 45 ° angle, add to the measure the letter "D" (Right cut) or "S" (Left cut). Follow the instructions on p. 652. For profiles over 3 meters and maximum 6 meters the transport conditions are to be agreed.

#### Technical Sheet




#### code FM6.misura/01

\*Through this code you can order the profile in a non-standard linear length. Replace the word "measure" with the desired length in mm. To order a profile with one or both ends cut at a 45 ° angle, add to the measure the letter "D" (Right cut) or "S" (Left cut). Follow the instructions on p. 652. For profiles over 3 meters and maximum 6 meters the transport conditions are to be agreed.

#### Technical Sheet



### Minifile system Spring for closing cover



#### code FM.MLC

Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

#### Technical Sheet

