

## Microfile suspension

code MF031.840/01




### PRODUCT DESCRIPTION

Direct light suspension lamp, indoor, made of extruded aluminium 6060 square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules [power] assembled and wired; protocol [protocol]. Epoxy powder coated with [finish] color finish; complete with polycarbonate [diffuser] with diffusing film. Suspension cables in steel complete with micrometric regulators in chromed brass. Protection degree IP40.

### PRODUCT SPECS

|                              |                    |
|------------------------------|--------------------|
| Installation method          | Suspension         |
| Absorbed power               | 19,8 W             |
| Color temperature            | 4000K              |
| Color rendering index CRI    | >90                |
| Finishing                    | White              |
| Luminous flux of the product | 2789 lm            |
| Luminous efficiency          | 141 lm/W           |
| Protocol                     | On/Off             |
| Energy efficiency class      | D                  |
| Weight                       | 2.43 Lbs           |
| Dimension                    | L36.42"            |
| IP Grade                     | IP40               |
| Protection Class             | Class II appliance |
| Power supply                 | 220-240V 50-60Hz   |

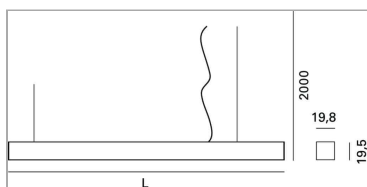

### MICROFILE LED



### WEB PAGE



### ASSEMBLY INSTRUCTIONS



