

Panca Outdoor

code IC510.830





PRODUCT DESCRIPTION

LED floor luminaire, for street furniture and orientation and service lighting, opal diffuser. Body in CementPiuma, lightweight fibreglass concrete, with "smooth cement" finish made by hand. Aluminium optical unit complete with 10W/mt LED source, integrated electronic power supply. Voltage In 220/240V 50/60hz and steel mounting plate for ground fixing, with anti-theft lock. Also available in non-electrified version. Degree of protection IP65. Seat complies with UNI 11306 of 02.2009. WARNING: This product has been realized with hand crafted procedures and not industrial. Small imperfections, empty, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

PRODUCT SPECS

Installation method	Floor
Absorbed power	17,2 W
Color temperature	3000K
Color rendering index CRI	80
Luminous flux of the product	1080 lm
Luminous efficiency	63 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	231.49 Lbs
Dimension	L17.72xW59.06xH17.72"
IP Grade	IP65
Power supply	220-240V 50-60Hz

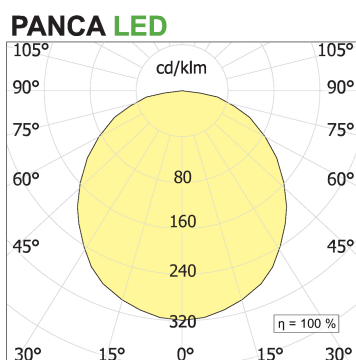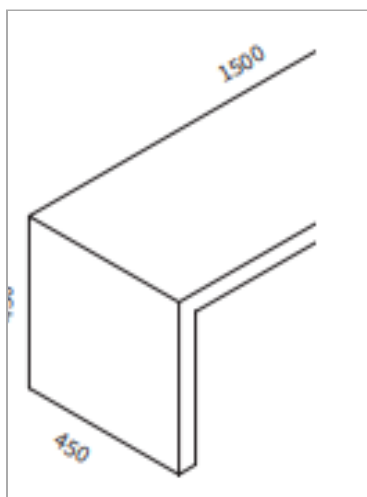

WEB PAGE



ASSEMBLY INSTRUCTIONS



