
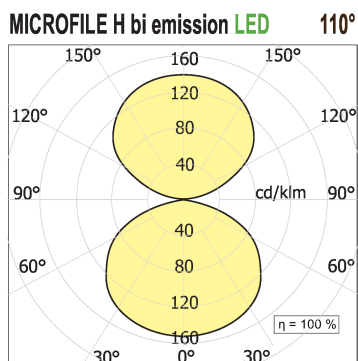


Microfile H Square Suspension biemission

code MFH042.840/01

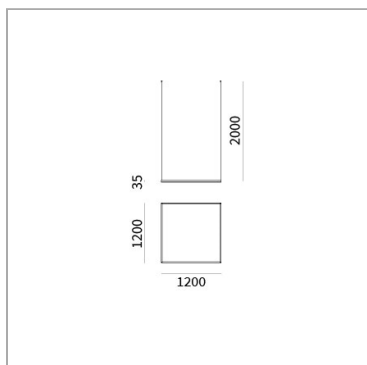

PRODUCT DESCRIPTION

Suspended, recessed, wall/ceiling lighting fixtures in extruded aluminum for direct or bi-emission diffused lighting of circular, square, rectangular or hexagonal shape complete with silicone screen. Integrated linear LED sources to be completed with 24Vdc remote power supply. IP44. Available default modules on demand and modular system.

PRODUCT SPECS

Installation method	Suspension
Absorbed power	2x100 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	25438 lm
Luminous efficiency	127 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	8.38 Lbs
Dimension	L47.24xW47.24"
IP Grade	Ip44
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply



WEB PAGE



ASSEMBLY INSTRUCTIONS



The product will be delivered disassembled with the necessary assembly instructions

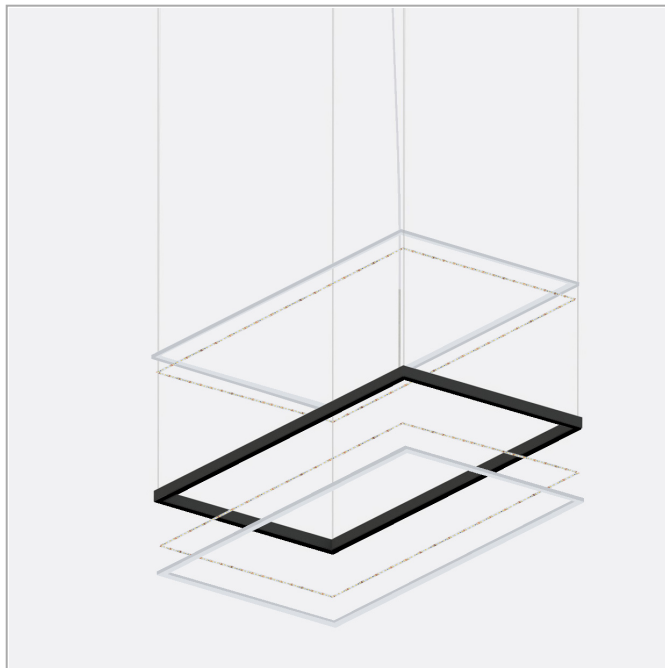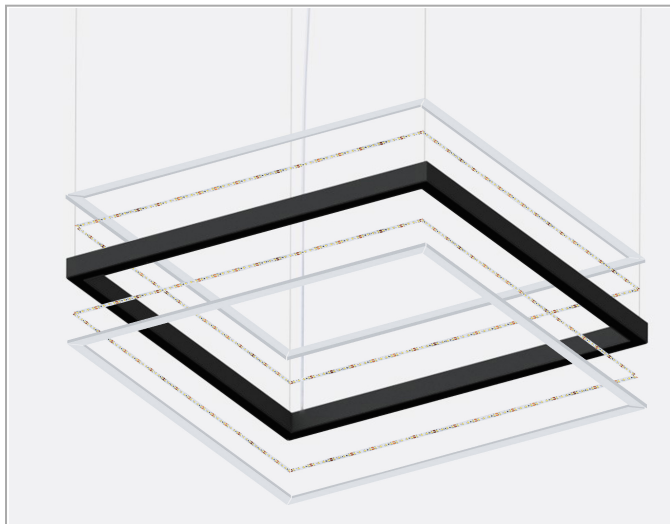

OPTIONAL ACCESSORIES

Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet

