


Microfile H Exagonal Suspension biemission

code MFH060.840/01


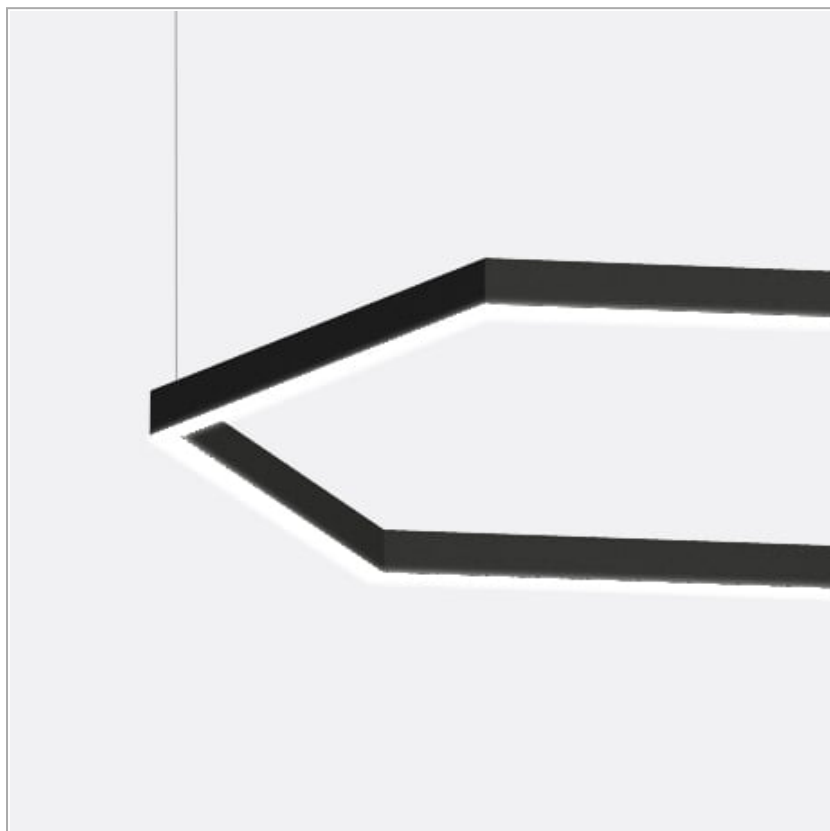


PRODUCT DESCRIPTION

Suspended, recessed, wall/ceiling lighting fixtures in extruded aluminum for direct or bi-emission diffused lighting of circular, square, rectangular or hexagonal shape complete with silicone screen. Integrated linear LED sources to be completed with 24Vdc remote power supply. IP44. Available default modules on demand and modular system.

PRODUCT SPECS

Installation method	Suspension
Absorbed power	2x45 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	4792 lm
Luminous efficiency	53 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	3.31 Lbs
Dimension	L27.36xW31.57"
IP Grade	Ip44
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

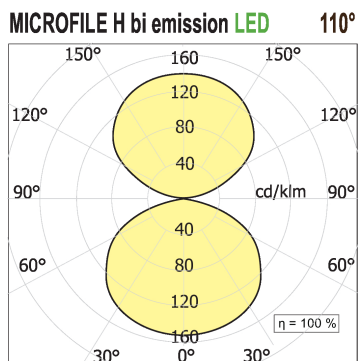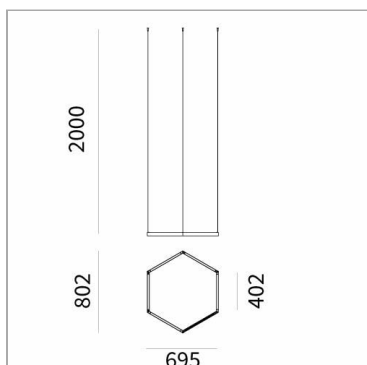


WEB PAGE



ASSEMBLY INSTRUCTIONS



The product will be delivered disassembled with the necessary assembly instructions

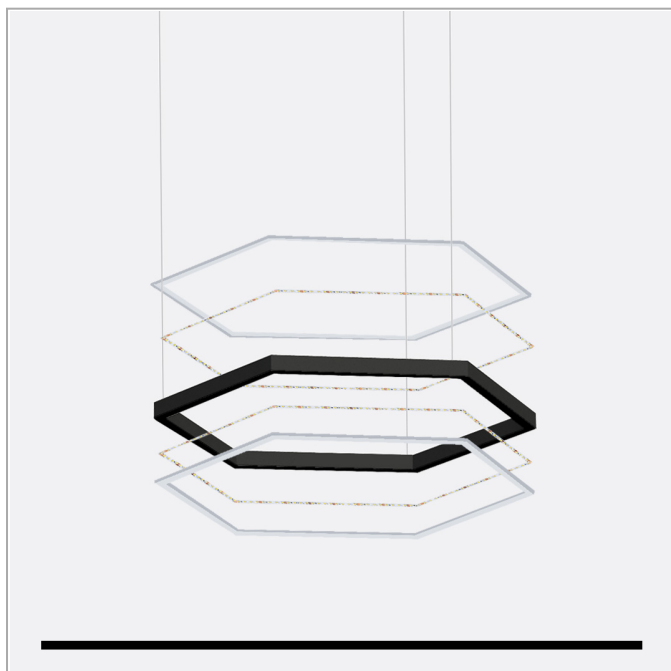

OPTIONAL ACCESSORIES

Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



Accessori Joints for Microfile H exagonal

code MFH080

uncategorized

Technical Sheet



code MFH081

uncategorized

Technical Sheet

