

File Flex Circle Ceiling Diffused

code FXA31.840/01





PRODUCT DESCRIPTION

Registered design

PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	33 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	4900 lm
Luminous efficiency	148 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	5.51 Lbs
Dimension	Ø19.69"
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

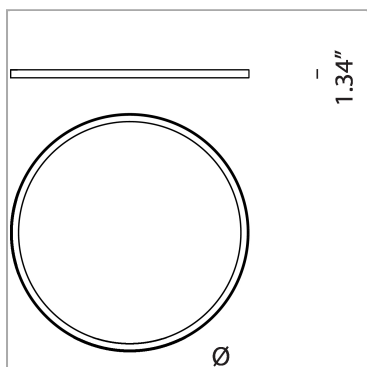

WEB PAGE



ASSEMBLY INSTRUCTIONS



The product will be delivered disassembled with the necessary assembly instructions

