

File Flex Circle Ceiling Diffused

code FXA32.840/01





PRODUCT DESCRIPTION

Registered design

PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	53 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	7890 lm
Luminous efficiency	149 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	8.60 Lbs
Dimension	Ø31.5"
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

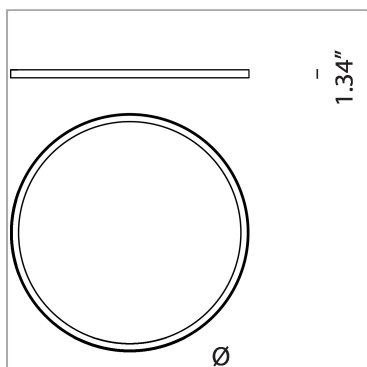

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 3

The product will be delivered disassembled with the necessary assembly instructions

