

File Flex Circle Ceiling Diffused

code FXA33.830/01





PRODUCT DESCRIPTION

Registered design

PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	67 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	9824 lm
Luminous efficiency	147 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	10.58 Lbs
Dimension	Ø39.37"
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

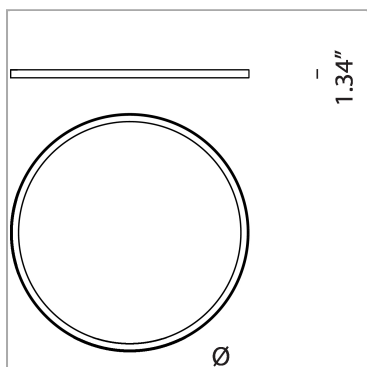

WEB PAGE



ASSEMBLY INSTRUCTIONS



The product will be delivered disassembled with the necessary assembly instructions

