


File Flex Suspension Circle Diffused

code FXA47.840/01


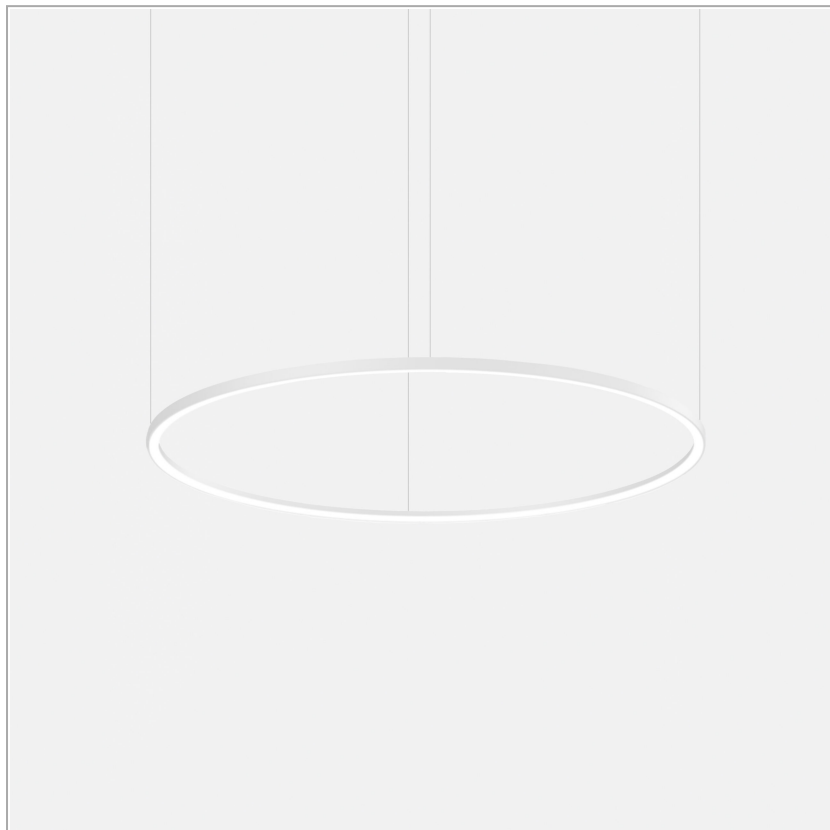


PRODUCT DESCRIPTION

To optimize shipping costs, the product of diameter 2500/3000 will be delivered in 2 or more parts that can be assembled as indicated in the assembly instructions.

PRODUCT SPECS

Installation method	Suspension
Absorbed power	169 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	25168 lm
Luminous efficiency	149 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 Ta 25°C
Energy efficiency class	D
Weight	26.90 Lbs
Dimension	Ø98.43"
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

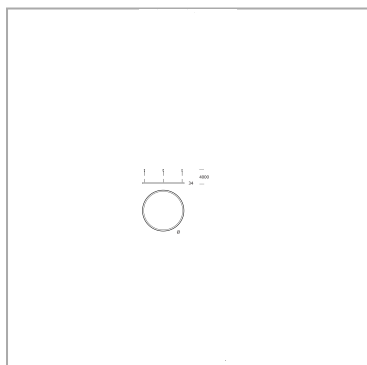

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Electronic power supply



code AE50.24V

uncategorized

Technical Sheet



Electronic power supply



code AE100.3.24V

Electronic power supply

Technical Sheet



Electronic power supply



code AE150.24VIP

uncategorized

Technical Sheet



Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



Electronic power supply (Copia)



code AE100.2.24V

Electronic power supply

OPTIONAL ACCESSORIES

CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



