
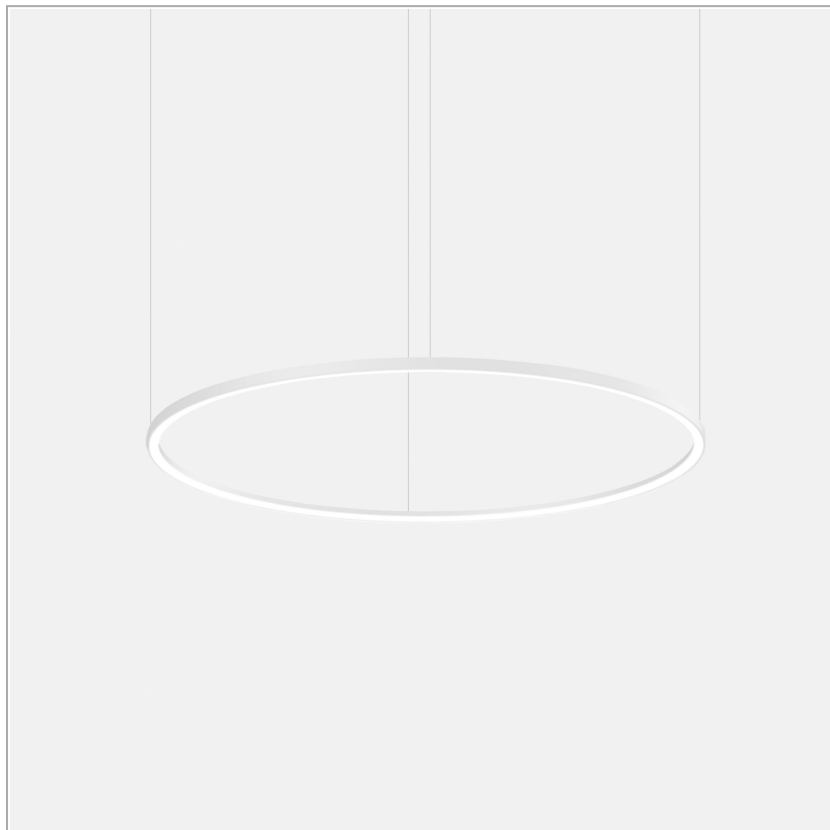


## File Flex Suspension Circle Diffused

code FXA48.830/01





### PRODUCT DESCRIPTION

To optimize shipping costs, the product of diameter 2500/3000 will be delivered in 2 or more parts that can be assembled as indicated in the assembly instructions.

### PRODUCT SPECS

Installation method	Suspension
Absorbed power	203 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	30255 lm
Luminous efficiency	149 lm/W
MacAdam color tolerance	3
Energy efficiency class	D
Weight	32.63 Lbs
Dimension	Ø118.11"
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

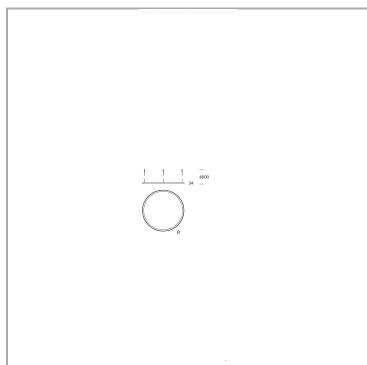

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Electronic power supply



code AE50.24V

uncategorized

Technical Sheet



### Electronic power supply



code AE100.3.24V

Electronic power supply

Technical Sheet



### Electronic power supply



code AE150.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE100.2.24V

Electronic power supply

## OPTIONAL ACCESSORIES

### CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



### Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



### Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



