
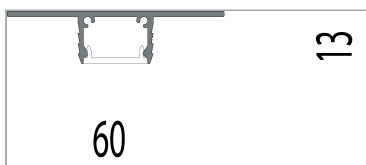


**Microfile Trimless recessed empty  
profile H13 superslim**

code MF42.1000/27

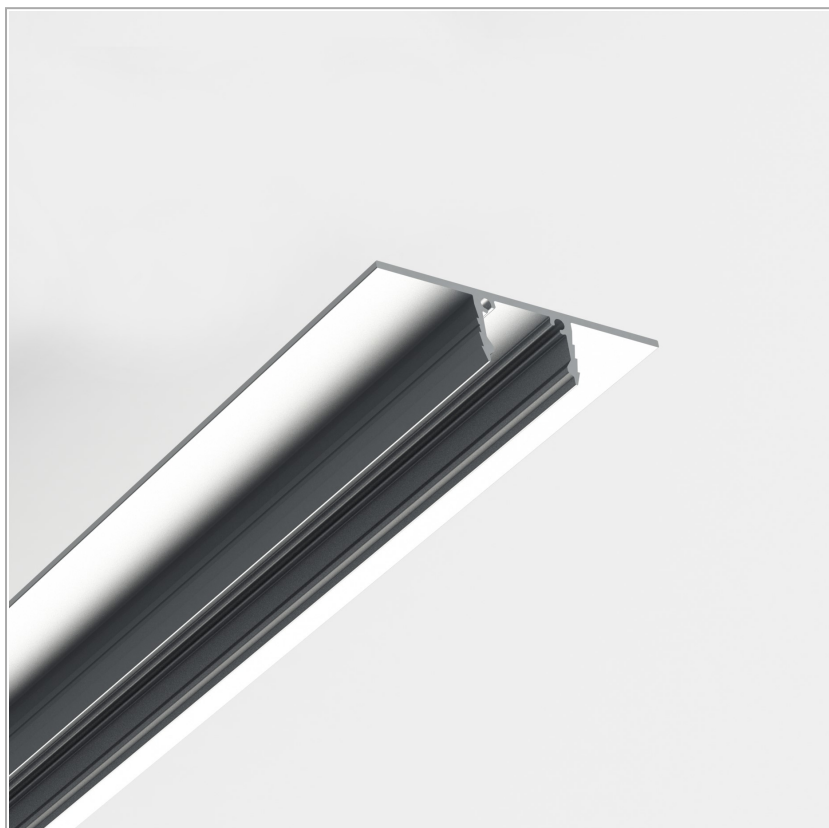

**PRODUCT DESCRIPTION**

Complete profile of double diffuser: the first is used as protection of the profile during installation and then removed, the second as final diffuser.

**PRODUCT SPECS**

|                     |                    |
|---------------------|--------------------|
| Installation method | system             |
| Finishing           | Oxidised aluminium |
| Weight              | 2.09 Lbs           |
| Dimension           | L39.37"            |

**WEB PAGE**



**ASSEMBLY  
INSTRUCTIONS**




Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 4

## OPTIONAL ACCESSORIES

### Couple of closure heads for superslim recessed profile



code MF42TI/27

Series of fixtures to be ceiling-mounted, recessed or trimless-recessed within flat surfaces or to be trimless-recessed in external and internal angles. Direct diffused lighting emission. Linear LED sources, to be completed with remote 24Vdc driver. Body in extruded aluminium, painted finish, complete with opal white polycarbonate diffuser. Light Proof system side-end caps. Degree of protection IP40 or IP65.

Technical Sheet



### Diffuser opal direct/indirect depending on family

Opal diffuser direct for Microfile, indirect for File 30 and Pro Edge, direct/indirect for Microfile H



code MF00P.1000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 1000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.2000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 2000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.3000

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to 3000 mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



code MF00P.misura

Square section 6060 aluminium extrusion profile square section measuring 30x30 mm powder-coated colour epoxy powder coated, cut to mm for ceiling installation, suspension and flush mounting. In the suspension version it is also possible to have indirect light emission.

Technical Sheet



### Microfile System – Silicone diffuser

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 2 / 4



code MFH00TH.misura

Silicone diffuser, to choose, to replace the polycarbonate (already included in the profile), in case you want a different light shield.

Technical Sheet



