

## File Flex Circle Suspension - Without linear LED

code FXA42U/01





### PRODUCT DESCRIPTION

File Flex is a patented products of Lucifero's made of versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36

### PRODUCT SPECS

Installation method	Suspension
Finishing	White
Weight	8.60 Lbs
Dimension	Ø31.5"

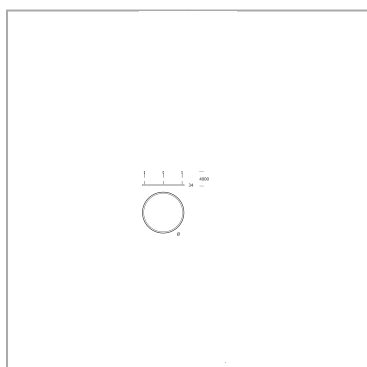

### WEB PAGE



## OPTIONAL ACCESSORIES

### File Flex Circle Ceiling Diffused (Copia)

File Flex is a versatile extruded aluminum profile capable of drawing infinite shapes, both as surface mounted and suspended device. Its asymmetric section is specially designed to create unique lighting effects whilst guaranteeing optimal lighting levels. The linear LED source follows the development of the profile shielded by a flexible diffuser in extruded opal silicone, for direct and uniform diffused light. The system allows the combination of different lighting technology options, including: multi-optics LED downlight from the Leva series, adjustable spotlights from the Spot Focus Ø26mm/1,02" and Ø36mm/1,42" series or, the most used, continuous diffused lighting. The composition must be completed by drivers 24V or 48V stabilized and aluminum closing covers if necessary



code FX260.1U27

Registered design

Technical Sheet



code FX260.1U30

Registered design

Technical Sheet



code FX260.1U35

Registered design

Technical Sheet



code FX260.1U40

Registered design

Technical Sheet



code FX260.2U27

Registered design

Technical Sheet





code FX260.2U30

Registered design

Technical Sheet



code FX260.2U35

Registered design

Technical Sheet



code FX260.2U40

Registered design

Technical Sheet



code FX260.3U27

Registered design

Technical Sheet



code FX260.3U30

Registered design

Technical Sheet



code FX260.3U35

Registered design

Technical Sheet



code FX260.3U40

Registered design

Technical Sheet





code FX260.4U27

Registered design

Technical Sheet



code FX260.4U30

Registered design

Technical Sheet



code FX260.4U35

Registered design

Technical Sheet



code FX260.4U40

Registered design

Technical Sheet



code FX260.5U27

Registered design

Technical Sheet



code FX260.5U30

Registered design

Technical Sheet



code FX260.5U35

Registered design

Technical Sheet





code FX260.5U40

Registered design

Technical Sheet



code FX260.6U27

Registered design

Technical Sheet



code FX260.6U30

Registered design

Technical Sheet



code FX260.6U35

Registered design

Technical Sheet



code FX260.6U40

Registered design

Technical Sheet



code FX260.7U27

Registered design

Technical Sheet



code FX260.7U30

Registered design

Technical Sheet





code FX260.7U35

Registered design

Technical Sheet



code FX260.7U40

Registered design

Technical Sheet



code FX260.8U27

Registered design

Technical Sheet



code FX260.8U30

Registered design

Technical Sheet



code FX260.8U35

Registered design

Technical Sheet



code FX260.8U40

Registered design

Technical Sheet





