


Fifty5 System - Reglette LED

code FT157.830

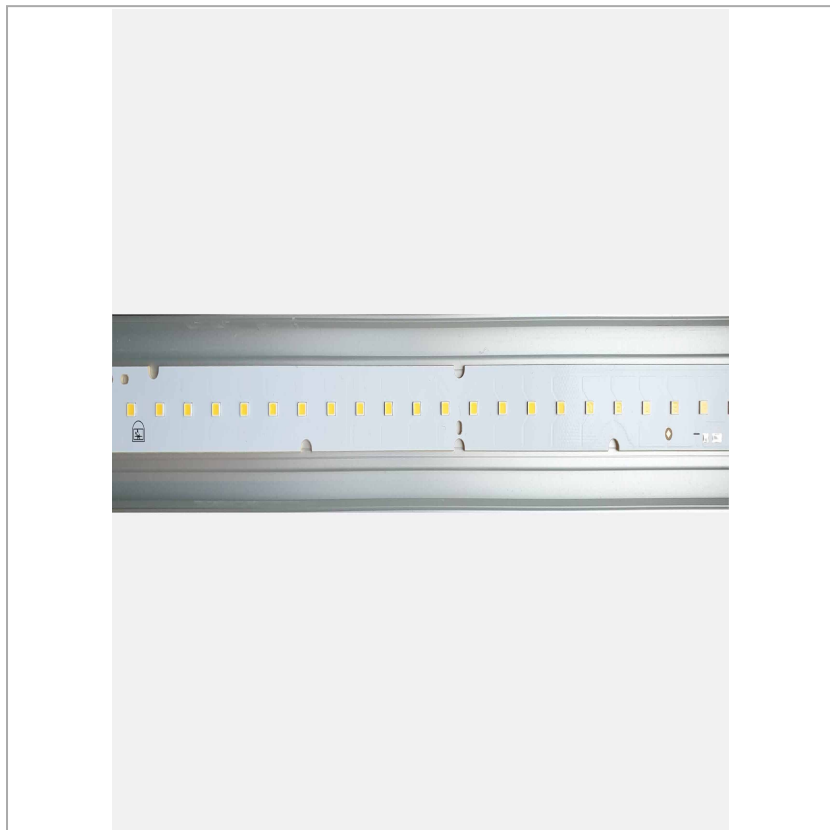


PRODUCT DESCRIPTION

Modular system, in extruded aluminum 55x55mm, for ceiling installation, suspension and recessed trimless (through the use of special accessories) to complete with the necessary dedicated accessories. Textured or anodized painted finish. Diffused light screens in opal polycarbonate, professional optics with different beam openings and, if necessary, equipped with spectra for horticulture and tunable white TW. Possibility of insertion of anti-glare eyelid with patent pending attachment system. Degree of protection IP40

PRODUCT SPECS

Installation method	system
Absorbed power	51,2 W
Color temperature	3000K
Color rendering index CRI	>90
Luminous flux of the product	7936 lm
Luminous efficiency	155 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	On/Off
Energy efficiency class	E
Dimension	L89.06"
IP Grade	IP20
Power supply	220-240V 50-60Hz

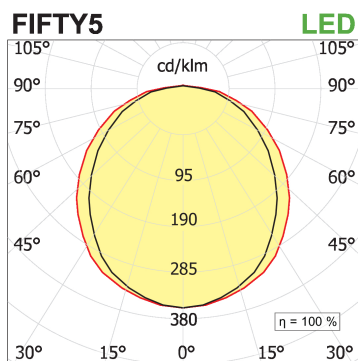

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1