

## File 2H double emission wall

code F2H13.830P/01





## PRODUCT DESCRIPTION

### Direct and indirect light with opal diffuser

## PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Wall surface mounted        |
| Absorbed power               | 2x32 W                      |
| Color temperature            | 3000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Opal polycarbonate diffuser |
| Finishing                    | White                       |
| Luminous flux of the product | 9920 lm                     |
| Luminous efficiency          | 155 lm/W                    |
| MacAdam color tolerance      | 3                           |
| Life time estimate           | 50000h Ta 25° L80B10        |
| Protocol                     | On/Off                      |
| Energy efficiency class      | E                           |
| Dimension                    | L55.91"                     |

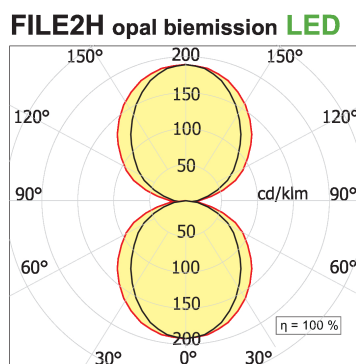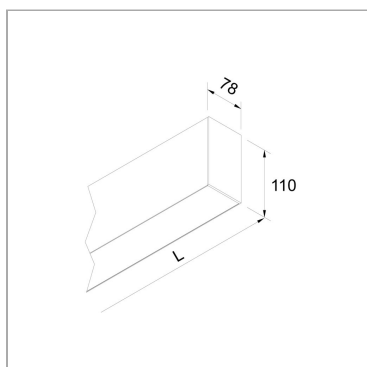

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 1