


Focus 55 driver included

code FS015.940S/01

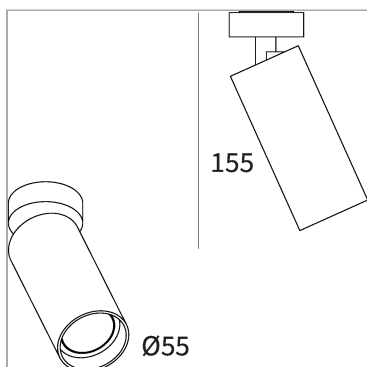

PRODUCT DESCRIPTION

Extremely small projector collection. The COB LED versions include high-performance light source to be completed with remote driver (excluding Focus Ø55, with rectangular canopy, equipped with on-board driver). GU10 versions to be completed with light bulb (max 50W). The range is divided into three types of fixtures with powers of 5.7W for the Ø26mm, 8w for the Ø36mm and 12.7W or 18.5W for the Ø55 depending on the model. Various installation possibilities: on ferritic metal surfaces in the magnetic version; wall or ceiling with round base (remote driver) on plasterboard ceiling in flush-mounted version or deep recessed with remote driver, transformable into trimless version using the available accessory.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Absorbed power	18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	2394 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H6.1 Ø2.17"
IP Grade	IP20
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lens With Ring Satin lens with rings ø55




code L055S.A/01

uncategorized. Bianco finishing
Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens With Ring Elipsoid lens with ring ø55



code L055E.A/01

uncategorized. Bianco finishing
Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens With Ring Asymmetric lens with ring ø55




code L055A.A/01

uncategorized. Bianco finishing
Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens With Ring Honeycomb louver with ring ø55



code L055R.A/01

uncategorized. Bianco finishing

Technical Sheet



