

Best frame fixed - wallwasher

code BT550.930U/01




PRODUCT DESCRIPTION

Recessed ceiling fixed and adjustable luminaires, made in die casted aluminum, painted by powder coating. Integrated LED source. The light engine can be removed without using any tool for an easy assemble and in case of maintenance. Power supplies available as accessories. The front trim is available in white and black. IP20.

PRODUCT SPECS

Installation method	recessed with frame
Absorbed power	5 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	655 lm
Luminous efficiency	131 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	1.08 Lbs
Dimension	L2.17xH2.99 Ø2.56"
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

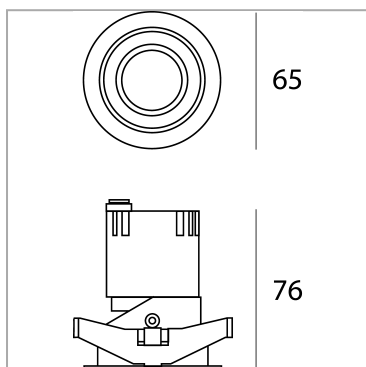

WEB PAGE



