


Minifile Openlight System Single fixing bracket for semi-recessed version

code MO007

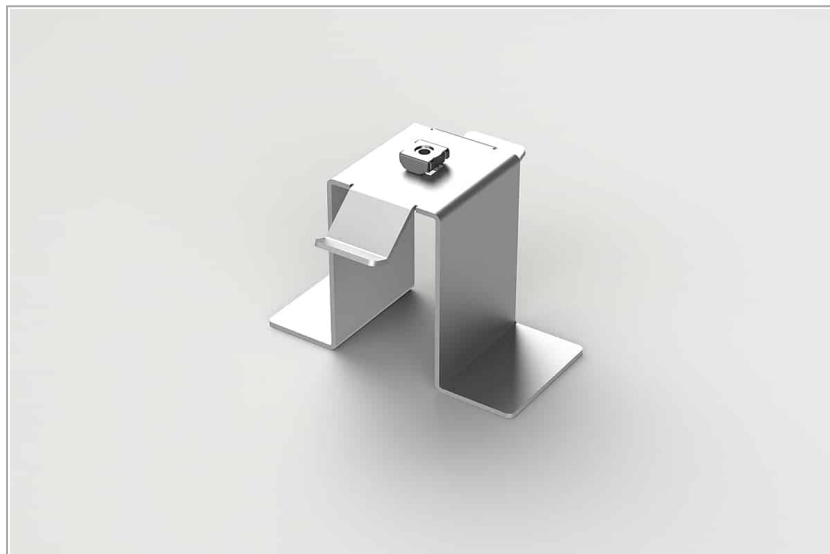

PRODUCT DESCRIPTION

Series of semi-recessed, ceiling-mounted or suspended fixtures for direct diffused lighting. For linear LED sources or T16 fluorescent seamless lamps. 230/240V 50/60Hz integrated electronic supply. Available both as default modules and as modules to be assembled in a system. Body in extruded aluminium, painted or anodized finish. Opal white polycarbonate diffuser and Light Proof system side-end caps. Degree of protection IP40 or IP43, according to the way that it is installed.

PRODUCT SPECS

Installation method	system
Dimension	"

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimeters. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25° C unless otherwise specified. We reserve the right to make changes to our products at any time.