


Straight blank profile

code LB340/01

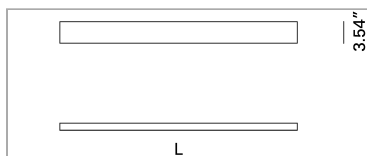

PRODUCT DESCRIPTION

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

PRODUCT SPECS

Installation method	system
Finishing	White
Dimension	L39.37"

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Couple of closure heads for linear profile



code LB422/01


Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



Lbs System Upper joint

Upper joint for ceiling module, LBS system.



code LB425

Upper joint for ceiling module, LBS system.

Technical Sheet



Lbs System Joint to connect suspension perimetric emission to suspension direct-diffused emission

Joint connection between direct and perimeter suspensions for LBS system



code LB427

Technical Sheet



Lbs System Single steel hanging kit



code LB423.2

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB423.4

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



Painted perimeter diffuser



code LB431.1/01

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



Perimetric diffuser



code LB431

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB432

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet




code LB433

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



Indirect linear diffuser



code LB447

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



linear led ST22 3D



code ST22.3D30.5

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code ST22.3D40.5

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



Lbs System Power cable



code LB403.2

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB403.4

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB405.2

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB405.4

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB407.2

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB407.4

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet





code LB409.2

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet



code LB409.4

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

Technical Sheet

