


Fifty5 ceiling

code FT112.840D/01

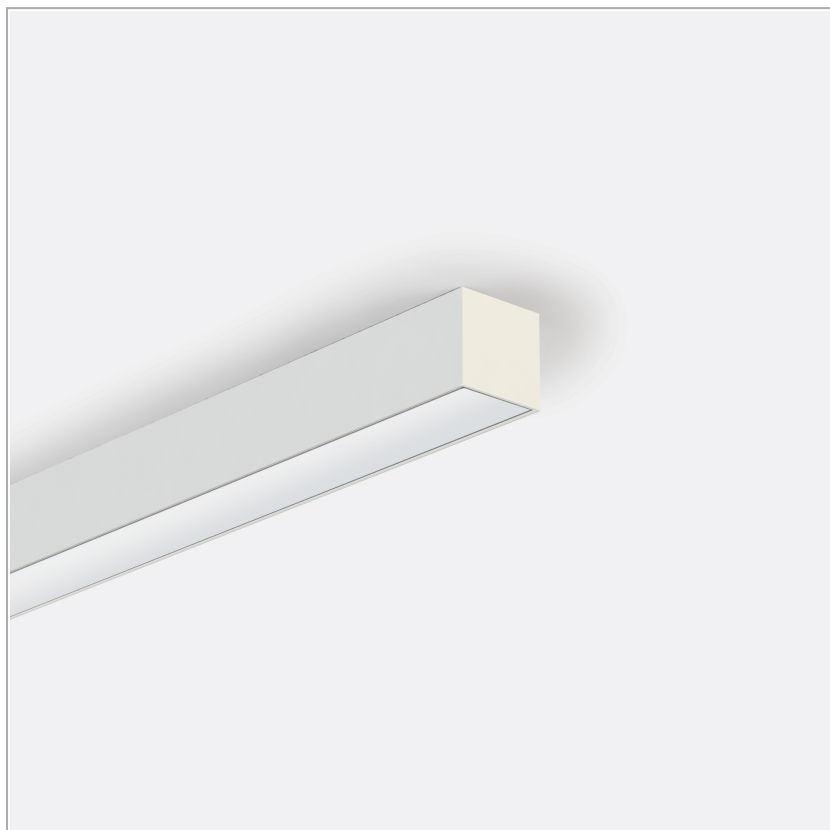


PRODUCT DESCRIPTION

Linear lighting fixtures, in extruded aluminum 55x55mm, for ceiling, suspension. Embossed painted finish. Screens for diffused light in opal polycarbonate, for the PRO version are available optics with different beam openings. Might be equipped, if necessary, with spectra for horticulture. IP40 / IP43. Available default modules and modular system.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	19,2 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	3065 lm
Luminous efficiency	160 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L33.94"
IP Grade	IP40
Power supply	220-240V 50-60Hz

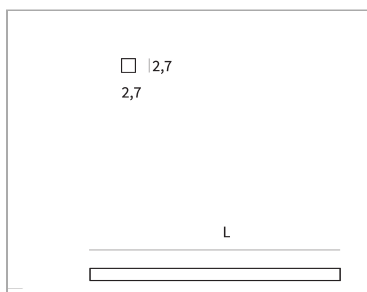

WEB PAGE



ASSEMBLY INSTRUCTIONS



The product will be delivered disassembled with the necessary assembly instructions