


## Fifty5 ceiling

code FT113.840D/01

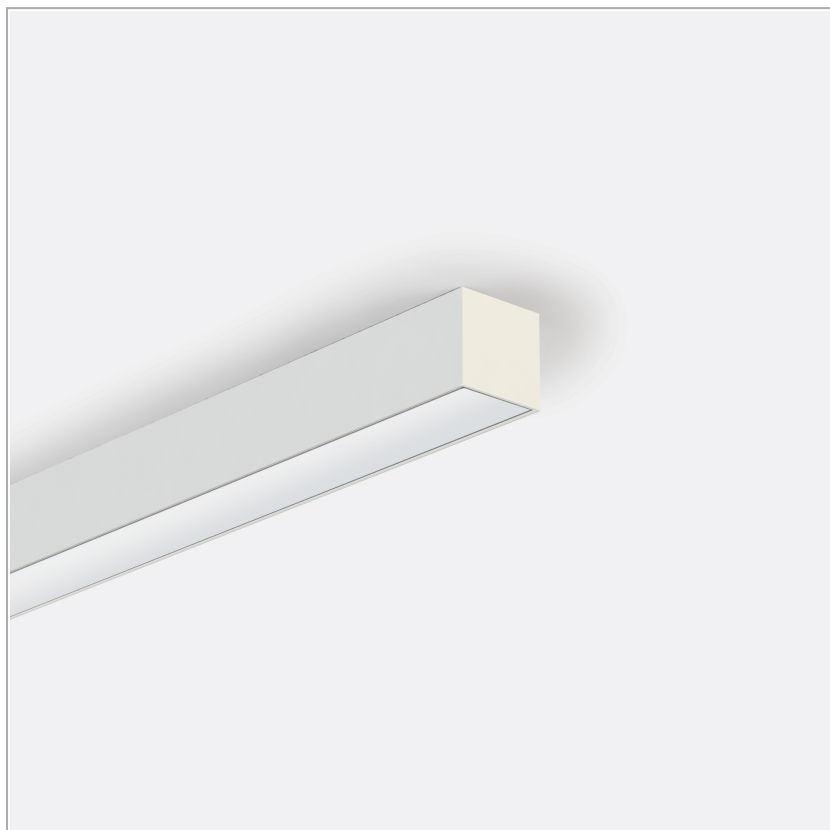


### PRODUCT DESCRIPTION

Linear lighting fixtures, in extruded aluminum 55x55mm, for ceiling, suspension. Embossed painted finish. Screens for diffused light in opal polycarbonate, for the PRO version are available optics with different beam openings. Might be equipped, if necessary, with spectra for horticulture. IP40 / IP43. Available default modules and modular system.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Ceiling surface mounted |
| Absorbed power               | 25,6 W                  |
| Color temperature            | 4000K                   |
| Color rendering index CRI    | >90                     |
| Finishing                    | White                   |
| Luminous flux of the product | 4087 lm                 |
| Luminous efficiency          | 160 lm/W                |
| MacAdam color tolerance      | 3                       |
| Life time estimate           | 50000h Ta 25° L80B10    |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | E                       |
| Dimension                    | L44.96"                 |
| IP Grade                     | IP40                    |
| Power supply                 | 220-240V 50-60Hz        |

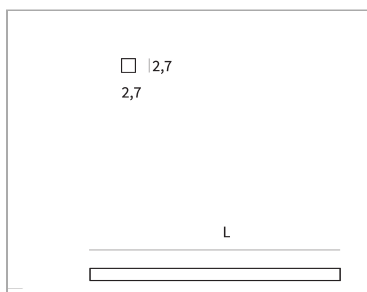

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



**The product will be delivered disassembled with the necessary assembly instructions**