

INCAS



DOWNLIGHT

INCAS


Famiglia di incassi orientabili, con sorgente COB LED, per incasso trimless o con battuta. Struttura in acciaio verniciato quadrata o rettangolare ad una o più sorgenti. Gruppo ottico cardanico con orientamento $\pm 25^\circ$ sui due assi orizzontali. La versione trimless necessita obbligatoriamente di controtelaio per installazione su controsoffitti in cartongesso da 13mm. Equipaggiati con LED ad alta resa, CRI >90, dissipatore passivo ad alte prestazioni in alluminio estruso anodizzato nero e riflettore metallizzato in alluminio 99,99%. Da associare a driver remoti stabilizzati in corrente. Grado di protezione IP20/IP23.

Family of trimless or trimmed adjustable recessed spotlights, with COB LED source. Square or rectangular painted steel structure with one or more light sources. Cardanic optical unit with $\pm 25^\circ$ orientation on the two horizontal axes. The trimless version necessarily requires a counterframe for installation on 13mm plasterboard ceilings. Equipped with high-performance LEDs, CRI > 90, high-performance passive heat sink in black anodized extruded aluminum and metallized reflector in 99.99% aluminum. To be associated with remote drivers. IP20/IP23.





INCAS MINIMAL 1




500 700 vedi accessori

LED		lm product/beam 3000K			CODE	Col.			
W	mA	Dim.	H	15°			24°	38°	
17	500	154x159	140	1930	1827	1905	IN01M.9		/01 /02
24,3	700	154x159	140	2468	2356	2430			
27	2700K	S	15°						
30	3000K	F	24°						
40	4000K	W	38°						

Accessori - accessories: TEIN01M: telaio Incas 1AM - frame Incas 1AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD


INCAS MINIMAL 2



LED		lm product/beam 3000K			CODE	Col.			
W	mA	Dim.	H	15°			24°	38°	
2x17	500	308x159	140	3860	3654	3810	IN02M.9		/01 /02
2x24,3	700	308x159	140	4936	4712	4860			
27	2700K	S	15°						
30	3000K	F	24°						
40	4000K	W	38°						

Accessori - accessories: TEIN02M: telaio Incas 2AM - frame Incas 2AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD


INCAS MINIMAL 3



LED		lm product/beam 3000K			CODE	Col.			
W	mA	Dim.	H	15°			24°	38°	
3x17	500	463x159	140	5790	5481	5715	IN03M.9		/01 /02
3x24,3	700	463x159	140	7404	7068	7290			
27	2700K	S	15°						
30	3000K	F	24°						
40	4000K	W	38°						


Accessori - accessories: TEIN03M: telaio incas 3AM - frame Incas 3AM
SOLO INSTALLAZIONE A CARTONGESSO - ONLY FOR PLASTERBOARD

TELAIO PER CARTONGESSO OBBLIGATORIO COMPULSORY PLASTERBOARD FRAME



Dim.	H	CODE
160x163	13	TEIN01M
314x163	13	TEIN02M
469x163	13	TEIN03M

INCAS 1




SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

8-30 162X162

LED		lm product/beam 3000K			CODE	Col.		
W	mA	Dim.	H	15°			24°	38°
17	500	178x178	140	1930	1827	1905	IN01.9	/01 /02
24,3	700	178x178	140	2468	2356	2430		

● Kelvin ● Beam
27 2700K **S** 15°
30 3000K **F** 24°
40 4000K **W** 38°

INCAS 2




SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

8-30 316X162

LED		lm product/beam 3000K			CODE	Col.		
W	mA	Dim.	H	15°			24°	38°
2x17	500	332x178	140	3860	3654	3810	IN02.9	/01 /02
2x24,3	700	332x178	140	4936	4712	4860		

● Kelvin ● Beam
27 2700K **S** 15°
30 3000K **F** 24°
40 4000K **W** 38°

INCAS 3





SOLO PER CARTONGESSO - ONLY FOR PLASTERBOARD

8-30 470X162

LED		lm product/beam 3000K			CODE	Col.		
W	mA	Dim.	H	15°			24°	38°
3x17	500	487x178	140	5790	5481	5715	IN03.9	/01 /02
3x24,3	700	487x178	140	7404	7068	7290		

● Kelvin ● Beam
27 2700K **S** 15°
30 3000K **F** 24°
40 4000K **W** 38°

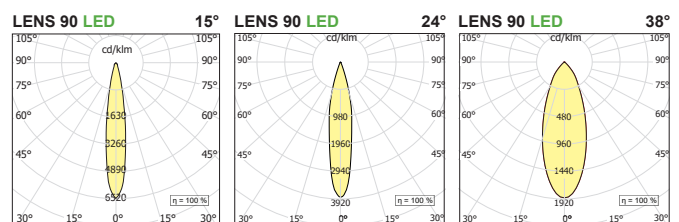

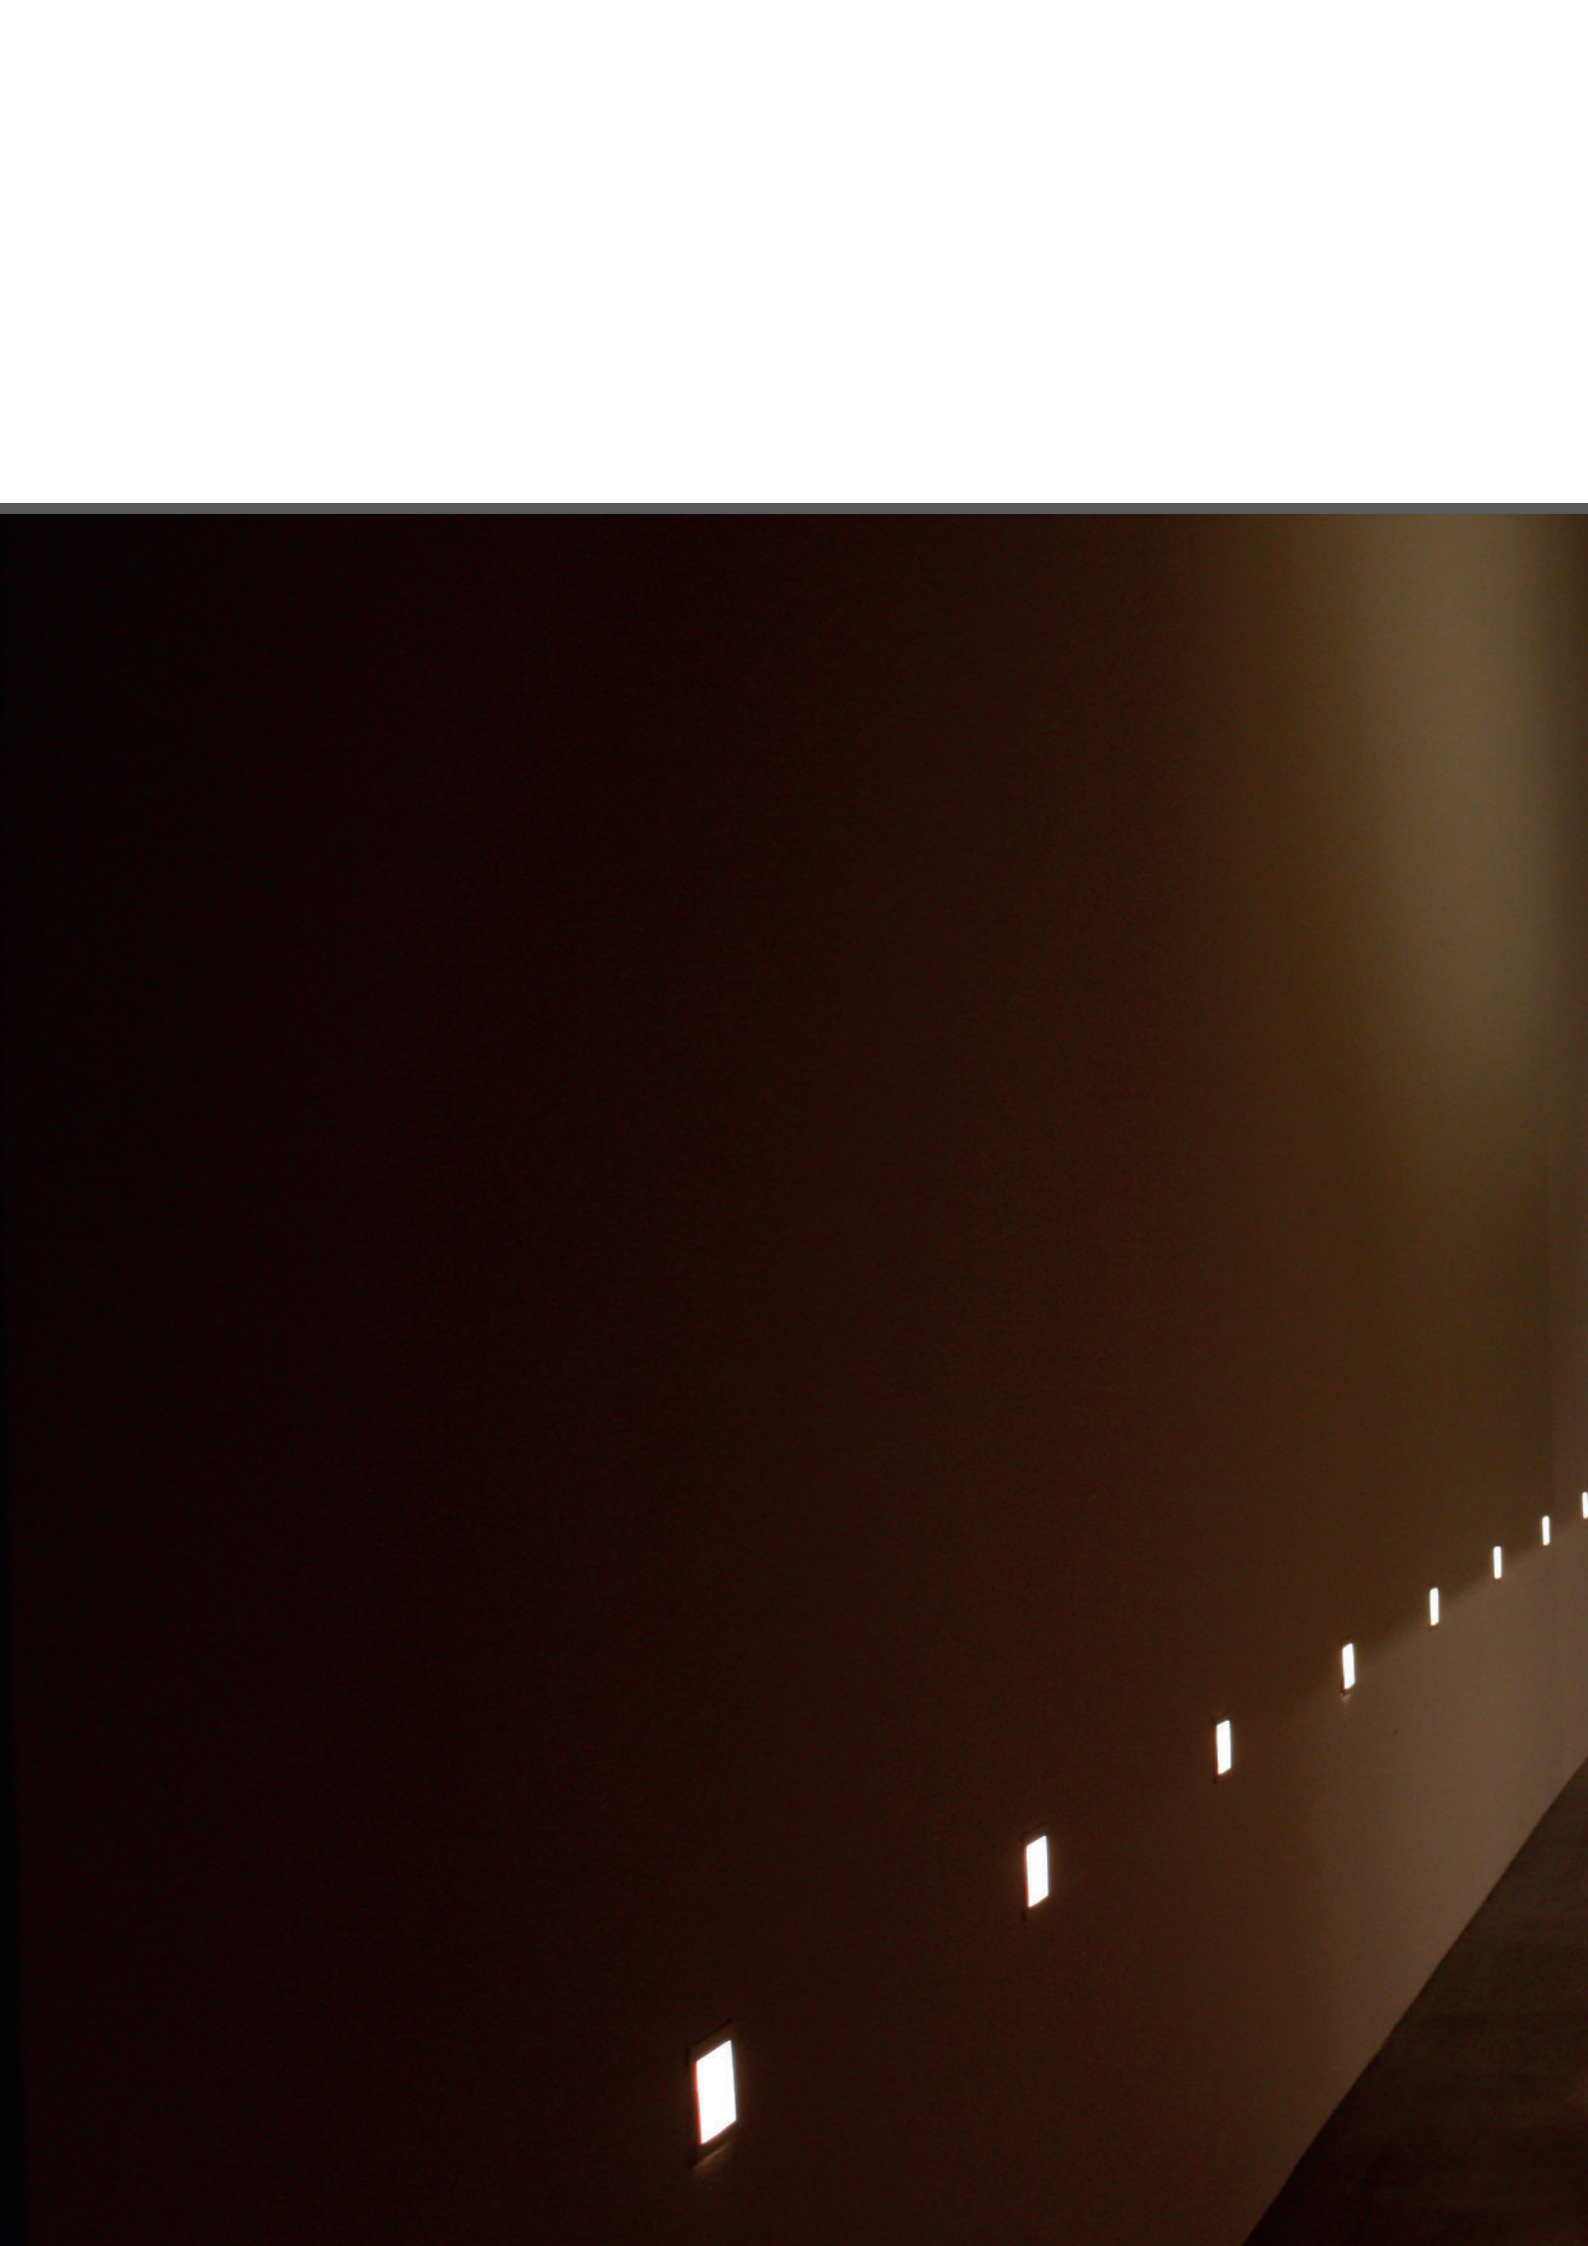

INCAS 45 - 90



INCAS 45-90



Apparecchio da incasso fisso per illuminazione d'accento o diffusa mediante impiego di vetro diffusore satinato disponibile come accessorio. Per sorgente LED integrata o per lampade LED GU10 230V/240V. Alimentazione remota disponibile come accessorio per le sorgenti a LED integrate. Corpo e cornice di battuta metallo verniciato. Installabile, anche, in pareti e soffitti in calcestruzzo o laterizio mediante apposita cassaforma in lamiera zincata disponibile come accessorio. Grado di protezione IP20/IP23.

Fixed recessed luminaire for accent or diffused lighting by using satin diffuser glass available as an accessory. For integrated LED source or for GU10 LED lamps 230V/240V. Remote power supply available as an accessory for the integrated LED sources. Body and frame in painted metal. It can, also, be installed in concrete or brick ceilings using a special galvanized metal outercasing available as accessory. IP20/IP23.



DOWNLIGHT

INCAS 45



0-25 A** IP20 CE



500 92X90

LED		lm product/beam 3000K		CODE	Col.
W	mA	Dim.	22°		
5	500	100x100x80	460	IN45.930S	/01

QT-14 c G9230V		Dim.	CODE	Col.
W		100x100x80		
1x max 60			IN45G9	/01

Accessori - accessories: VT/IN45.90: vetro diffusore satinato incas 45/90 - frosted glass diffuser - CC94: cassaforma incas 90 - 45 - Wallbox incas 90 - 45

INCAS 90





500 92X90

LED		lm product/beam 3000K		CODE	Col.
W	mA	Dim.	22°		
5	500	100x100x80	460	IN90.930S	/01

GU10 LED		Dim.	CODE	Col.
W		100x100x80		
1x max 50			IN90GU	/01

Accessori - accessories: VT/IN45.90: vetro diffusore satinato incas 45/90 - frosted glass diffuser - CC94: cassaforma incas 90 - 45 - Wallbox incas 90 - 45

INCAS 45 MICRO



500 12Vac 54X54


LED		lm product/beam 3000K		CODE	Col.
W	mA	Dim.	30°		
1,5	500	62x62x60	136	IN93L2	/01

QT12-LP GY6,35 12V		Dim.	CODE	Col.
W		62x62x60		
1x max 35			IN93	/01

Accessori - accessories: VT/IN92: vetro diffusore satinato incas 45/90 MICRO - frosted glass diffuser - CC94M: cassaforma incas 90 - 45 micro - wallbox incas 90 - 45 micro

Vetro diffusore satinato conferisce al prodotto grado di protezione IP40. | Frosted glass diffuser provides the fixture IP40 protection

INCAS 90 MICRO



500 12Vac 54X54




LED		lm product/beam 3000K		CODE	Col.
W	mA	Dim.	30°		
1,5	500	62x62x65	136	IN92L2	/01

QR-CB35 GU4 12V		Dim.	CODE	Col.
W		62x62x65		
1x max 35			IN92	/01

Accessori - accessories: VT/IN92: vetro diffusore satinato incas 45/90 MICRO - frosted glass diffuser - CC94M: cassaforma incas 90 - 45 micro - wallbox incas 90 - 45 micro

Vetro diffusore satinato conferisce al prodotto grado di protezione IP40 | frosted glass diffuser provides the fixture IP40 protection



VETRO DIFFUSORE SATINATO
FROSTED GLASS DIFFUSER



		CODE
INCAS 45/90	81X84	VT/IN45.90
INCAS45/90 MICRO	46X47	VT/IN92

L'inserimento di questo accessorio eleva il grado di protezione dell'apparecchio ad IP40 e IP43 | the inclusion of this accessory raises the protection degree of the lamp to IP40 and IP43

CASSAFORMA
WALLBOX

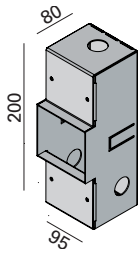

		CODE
INCAS 45/90		CC94
INCAS 45/90 MICRO		CC94M

Cassaforma in lamiera zincata per installazione in laterizio o calcestruzzo - galvanized metal wallbox for installing in brick or reinforced concrete

