

File ceiling

code F1200.8TWX/01



PRODUCT DESCRIPTION


Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 12.8 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	12,8 W
Color temperature	Tunable White
Color rendering index CRI	>90
Optic	Microprismatic diffuser
Finishing	White
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80 B10
Protocol	On/Off
Energy efficiency class	E
Weight	2.34 Lbs
Dimension	L22.83"
IP Grade	IP40
Power supply	220-240V 50-60Hz



FILE microprismatic LED

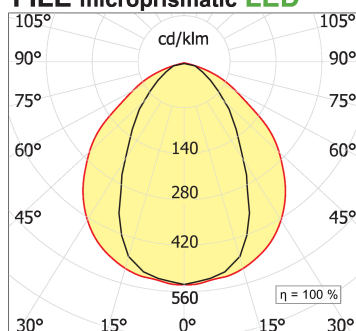

WEB PAGE



ASSEMBLY INSTRUCTIONS

